

e-Cruise II

Installation instructions for
Toyota Yaris & Yaris Verso Modelle 2002 - 2006



Altendorf GmbH
Telefon +49 391 7446260- www.a-a.de

1530059 Rev. 1.0

Page 1 / 6

Vor der Installation

Lesen Sie die gesamte Einbauanleitung sorgsam durch, bevor Sie mit der Installation beginnen. Sie beinhaltet Informationen darüber, wie der E-Cruise fachgerecht eingebaut wird.

Der E-Cruise darf nur von Fachleuten eingebaut werden, da moderne Fahrzeuge mit kostenintensiver Elektronik ausgestattet sind, welche durch unangemessenes Handeln leicht beschädigt werden kann.

Altendorf GmbH kann für keine Fehler aufgrund falscher Installation verantwortlich gemacht werden.

Kontrollieren Sie den Einbausatz auf alle vorhandenen Teile.

1x	Modul (1530059)
1x	14-poliger Stecker (15030142 Gaspedal) Plug & Play
1x	12-poliger Stecker (1530155)Kupplung, Bremse, Speed
1x	3615 (Kupplungsschalter)
1x	Einbauanleitung

Optional LED bestellen ([Temp-LED 1539011](#))

Hinweis: Es können folgende Bedienelemente verwendet werden.

[Temp-1533141](#) (Standardbedienelement -links/rechts Montage-)

[Temp-1533124](#) (Bedienelement mit LED - links Montage-)


[Temp-1533180](#) (Bedienelement Memory, 3-farb-LED & Limiter -links Montage)




Altendorf GmbH |
Telefon +49 391 7446260- www.a-a.de



Wichtige Einbauhinweise:

1. Trennen Sie immer das Massekabel von der Batterie, bevor Sie mit der Installation beginnen.
2. Benutzen Sie immer die beiliegende Einbauanleitung.
3. Überprüfen Sie, ob die Rev. Nummer des Aufklebers mit der Nummer der Einbauanleitung übereinstimmt.
4. Halten Sie den evtl. notwendigen Radiocode bereit.
5. Suchen Sie eine geeignete Stelle für die Montage des Bedienteils und des Moduls.
6. Nicht benötigte Kabel sind zu isolieren.
7. Benutzen Sie nur Multimeter bei der Messung.
8. Alle Kabel sind zu **löten**.
9. Alle Verbindungen sind von der Kabelseite aus zu betrachten.
10. Führen Sie abschließend eine Probefahrt durch und testen dabei die Funktionen des E-Cruise.

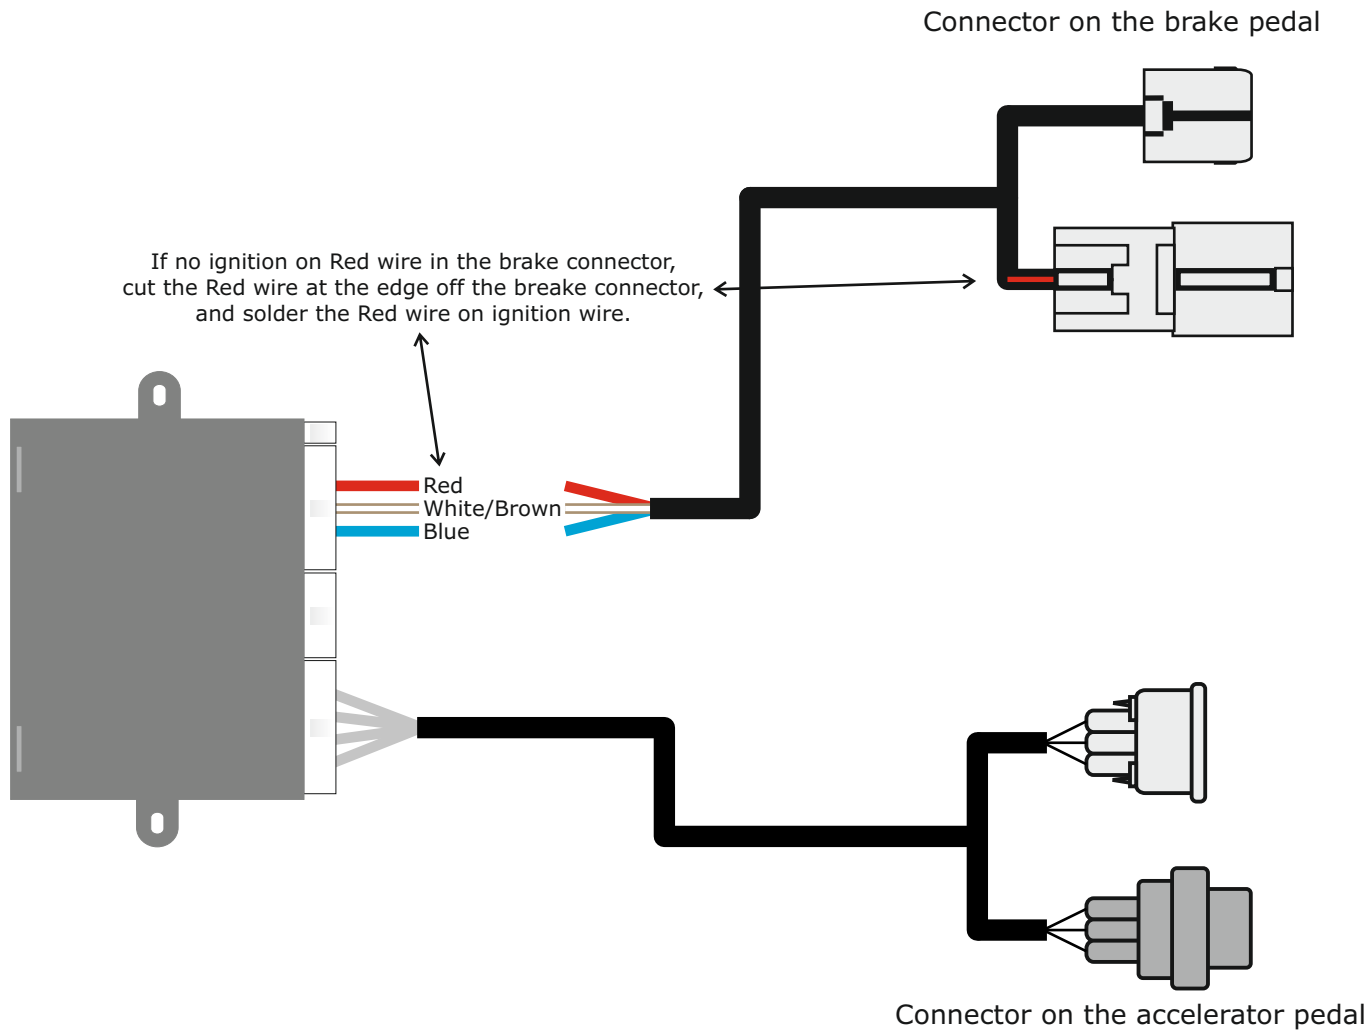


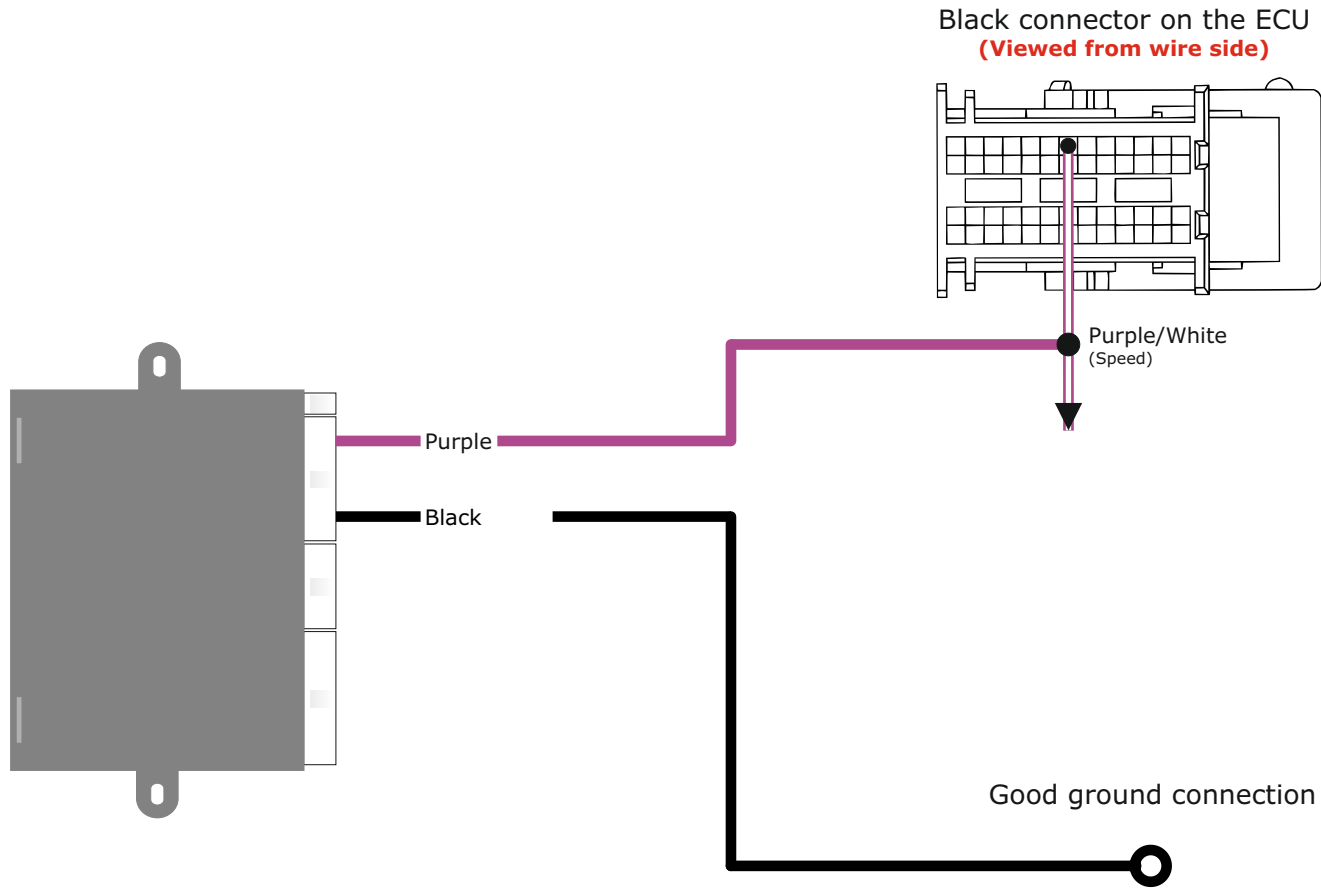

Only use one of the solutions.

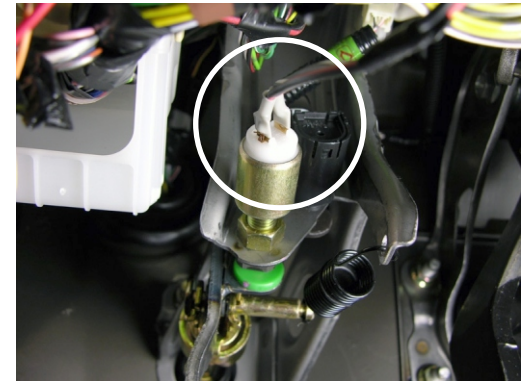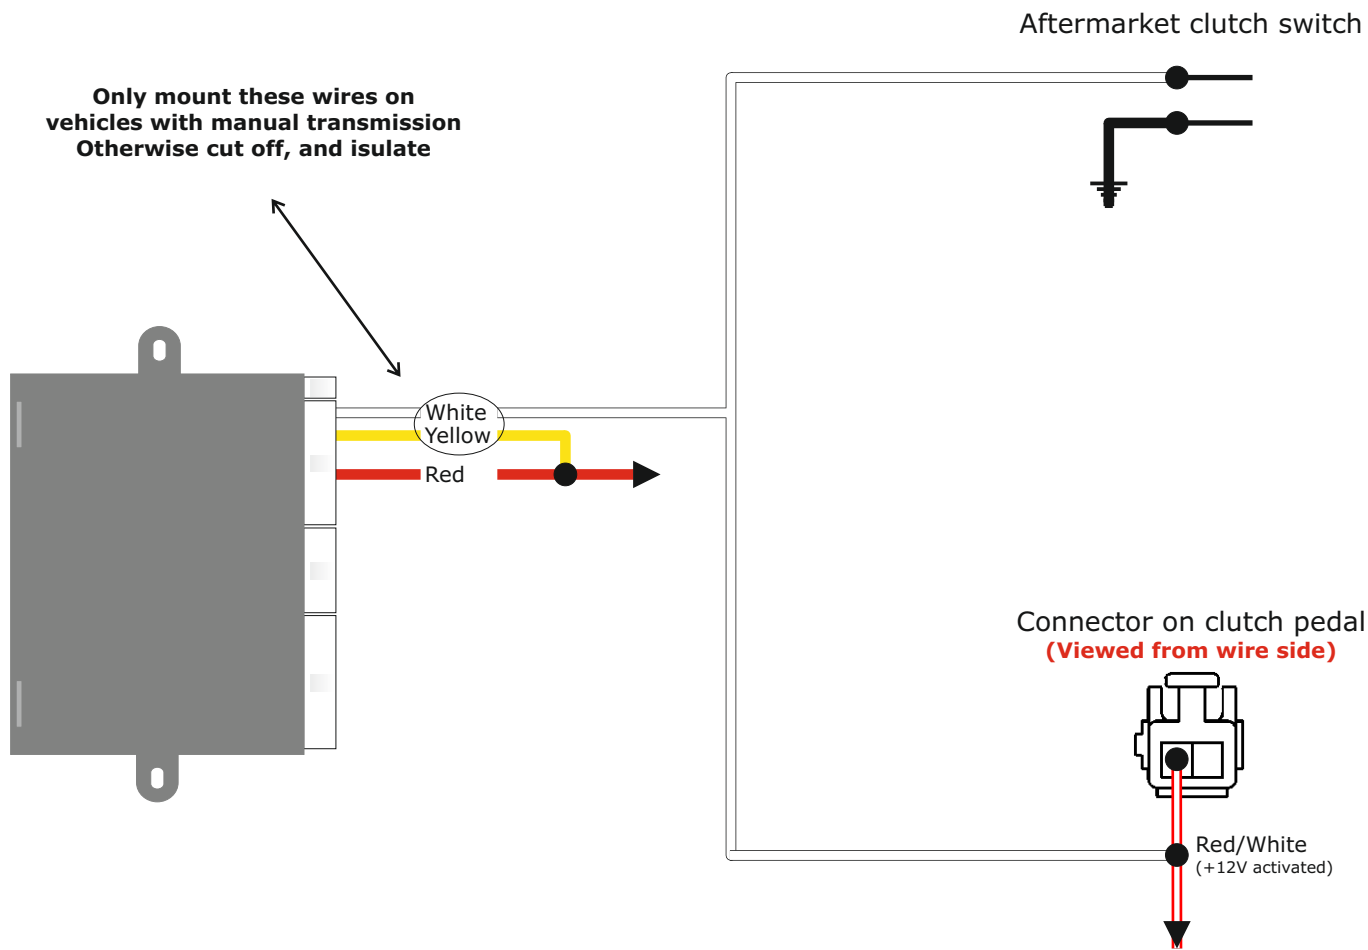

TOYOTA Yaris & Yaris Verso:
The Pedal stop is measured and replaced by the enclosed clutch switch. The clutch switch must be placed on the same level as the pedal stop

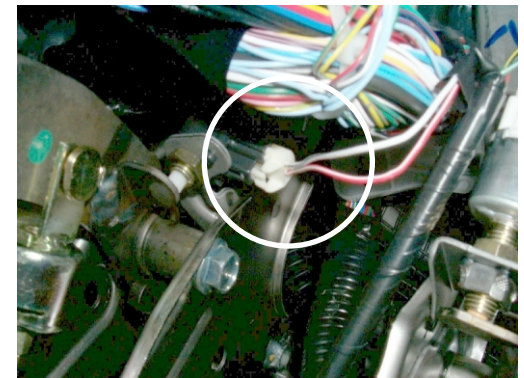


TOYOTA Yaris Verso from 10-2003:
Original clutch switch.

Trouble shooting guide.

Enable Diagnostic mode:



Put ignition on the vehicle



Within 2 seconds, press and hold the ON function



Wait until test LED lights up in RED color



Release ON function



Within 5 seconds



Press and hold SET function




The test LED lights up in ORANGE color



Release SET function



Within 5 seconds



Press RES function



The test LED will flash in all 3 colors, provided that no inputs are activated.
Otherwise the test LED will light up red.

Reaction to the individual tests, requires that the function is active

Test 1 - Brake function. Activate RES briefly. Test LED will flash orange 1 time.

CANbus installation: (No wires mounted on the brake connector).

1. Test LED lights up Red, and changes to green when pedal is depressed.

Analog installation: (Wires mounted on the brake connector).

1. If both brake wires are installed correctly, the test LED will light up green.
2. Hot side of brake is defective = test LED lights up red.
3. Cold side of brake is defective = test LED lights up orange.
4. Both sides of brake defective = test LED flashes all 3 colors.
5. When brake pedal is depressed, the test LED lights up orange.

Test 2 - Clutch function. Activate RES briefly. Test LED will flash orange 2 times.

CANbus installation: (No wires mounted on the clutch connector).

1. Test LED lights up Red, and changes to green when pedal is depressed.

Analog installation: (Wires mounted on the clutch connector).

1. If clutch wires are installed correctly, the test LED lights up green.
2. If clutch is defective, the test LED lights up red.
3. When clutch pedal is depressed, the test LED lights up red.

Test 3 - Accelerator pedal function (engine off). Activate RES briefly. Test LED will flash orange 3 times.

1. The test LED will slowly flash red/green.
2. Depressing the accelerator pedal will increase the freq. of the flashing.

Test 4 - VSS function (engine running). Activate RES briefly. Test LED will flash orange 4 times.

CANbus installation: (Purple wire is not connected).

1. The test LED will flash green if correct ID is received.

Analog installation: (Purple wire is connected).

1. The test LED will flash green when vehicle is moved.

Test 5 - TACHO function (engine running). Activate RES briefly. Test LED will flash orange 5 times.

CANbus installation: (Purple wire is not connected).

1. The test LED will flash green if correct ID is received.

Analog installation: (Purple wire is connected).

1. The test LED will flash green when RPM is raised.

Test 6 - Setup to Automatic gear. Activate RES briefly. Test LED will flash orange 6 times.

(This point should ONLY be performed if it is described on the front page with red text).

1. Activate and hold down the brake pedal.
2. Activate SET briefly = test LED lights up red.
3. Activate SET briefly again = test LED lights up orange. E-Cruise is set for automat gear. If this function is activated by mistake. The test procedure must be entered from start.

Setup to Manual gear.

1. Activate and hold down the brake pedal.
2. Activate SET briefly = test LED lights up green.
3. Activate SET briefly again = test LED lights up orange. E-Cruise is set for manual gear.